

Rotating cleaners - Chemidisc 25



C-PTFE




PTFE

Chemidisc 25	
Working pressure:	2-4 bar (29 - 58 psi)
Cleaning diameter:	max. 1.5 m (4.9 ft)
Flow rate:	2.4 - 3.6 m ³ /h (40 - 60 l/min / 10.57 - 15.85 USgpm)
Spray angle:	360°
Operating temperature:	max. 95 °C (203 °F)
Ambient temperature/SIP:	max. 140 °C (284 °F), 30 min
Insertion opening:	min. Ø 31 mm (1.22 inch)
Materials:	C-PTFE or PTFE
Preferred mounting position:	any

- Chemical resistant - ideal for corrosive environments
- Lightweight construction - safer in glass lined vessels
- Effective wash - due to high rotation speed

Version	Part number
1/4" BSP male / C-PTFE	4660-1118-133
1/4" BSP male / PTFE	4660-1123-122

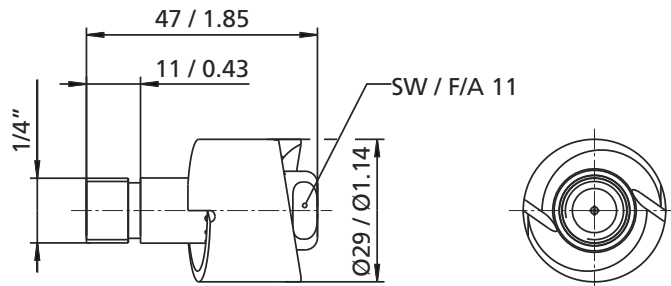

Dimensions (mm / inch)

