

Rotating cleaners - Torus 75







Torus 75	
Working pressure:	1 - 4 bar (14.5 - 58 psi)
Cleaning diameter:	max. 3.3 m (10.8 ft)
Flow rate:	1.8 - 4.6 m ³ /h (30 - 76.7 l/min / 7.9 - 20.3 USgpm)
Spray angle:	360° (optional 180°)
Operating temperature:	max. 65 °C (149 °F)
Ambient temperature:	max. 75 °C (167 °F), 30 min
Insertion opening:	BSP/NPT min. Ø 52 mm (2.05 inch) / Pin Fix 68 mm (2.38 inch)
Materials:	stainless steel 316L (1.4404) with PTFE or C-PTFE
Preferred mounting position:	any

- Ultrahygienic
- Low consumption of cleaning medium
- Effective wash - due to high rotation speed
- Low working pressure

Version	Part number
1/2" BSP female / C-PTFE	4660-1741-113
1/2" BSP female / PTFE	4660-1754-112
1/2" NPT female / C-PTFE	4660-1708-116
1/2" NPT female / PTFE	4660-1755-212
Pin Fix for 3/4" OD pipe (19.05x1.6) C-PTFE	4660-1744-413
Pin Fix for 3/4" OD pipe (19.05x1.6) PTFE	4660-1757-412

Dimensions (mm / inch)

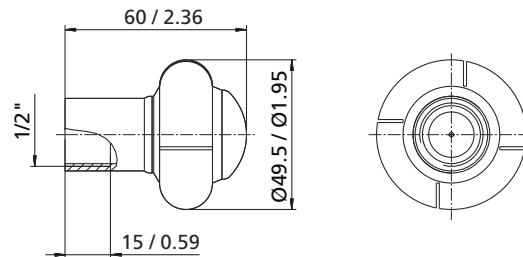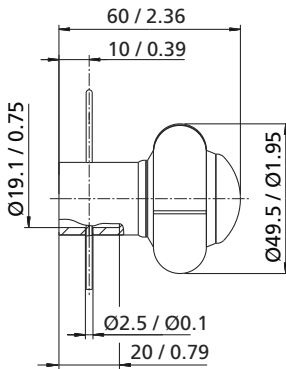

Pin Fix

BSP female thread

Dimensions (mm / inch)

