


Rotating cleaners - Turbodisc 25



Turbodisc 25	
Working pressure:	2-4 bar (29 - 58 psi)
Cleaning diameter:	max. 1.5 m (4.9 ft)
Flow rate:	2.4 - 3.6 m ³ /h (40 - 60 l/min / 10.57 - 15.85 USgpm)
Spray angle:	360°
Operating temperature:	max. 95 °C (203 °F)
Ambient temperature/SIP:	max. 140 °C (284 °F), 30 min
Insertion opening:	min. Ø 31 mm (1.22 inch)
Materials:	stainless steel 316L (1.4404) with C-PTFE or PTFE
Preferred mounting position:	any

- Effective wash - due to high rotation speed
- Low flow rates

Version	Part number
1/4" BSP male / C-PTFE	4660-1678-113
1/4" BSP male / PTFE	4660-1603-002
1/4" NPT male / C-PTFE	4660-1677-203
1/4" NPT male / PTFE	4660-1604-202

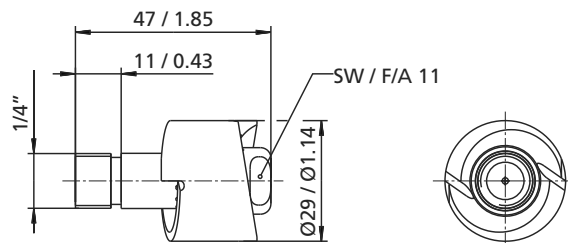

Dimensions (mm / inch)

